



692631 - INGLÊS

Data de Correção: 03/09/2024

WWW.SHEFFIELDKENYA.COM

INSTRUCTIONS MANUAL



FOOD PROCESSOR, STAINLESS STEEL, WITH SAFETY SYSTEM, WITH 7
DISCS DIAMETER 203 mm

MODEL


PA7 PRO

SUMMARY

1. Introduction	3
1.1 Safety	3
1.2 Main Components	5
1.3 Technical Characteristics	6
1.4 Selecting the Plates.....	6
1.5 Available Discs	8
2 Installation and Pre Operation	09
2.1 Installation	09
2.2 Pre Operation	11
3. Operation	12
3.1 Starting.....	12
3.2 Operation Procedures	13
3.3 Cleaning and Sanitizing	14
3.4 Cautions with Stainless Steel	15
4. General Safety Practices	16
4.1 Basic Operation Practices.....	16
4.2 Safety Procedures and Notes before Turning the Machine	17
4.3 Routine Inspection.....	18
4.4 Operation	18
4.5 After Finishing The Work.....	18
4.6 Maintenance	19
4.7 Warning.....	19
5. Analysis and Problems Solving.....	19
5.1 Problems, causes and solutions	19
6. Maintenance	21
7. Electric Diagram.....	22

This image shows a single page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, leaving small margins at the top and bottom. There are no vertical margin lines, text, or other markings on the page.

7. Electric Diagram

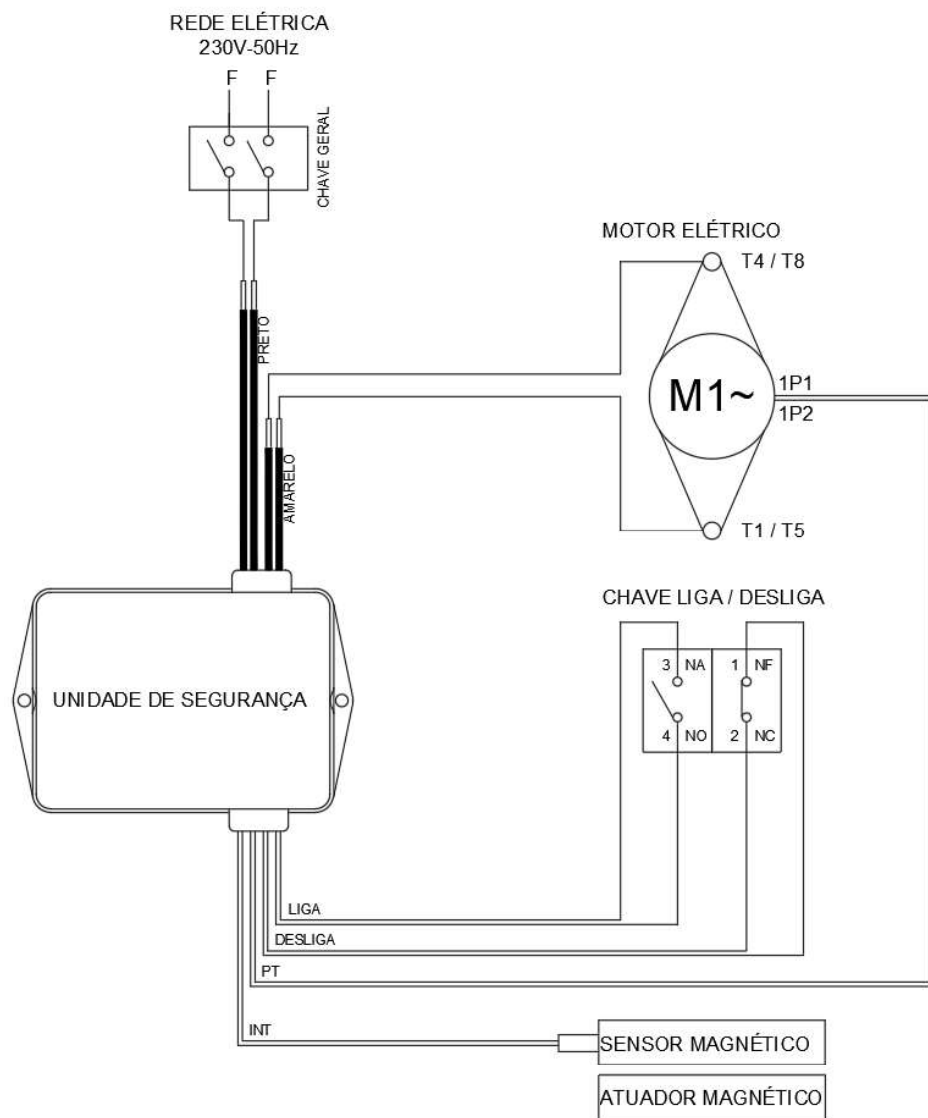

1. Introduction

1.1 Safety

When incorrectly used this equipment is a potentially DANGEROUS machine. Before using this equipment, read this Instructions Manual carefully and keep it accessible for future consulting.

To avoid accidents, injure or damages to the equipment, respect the following instructions:

- 1.1.1 In order to avoid the risk of electric shocks and damage to the machine, never operate it wearing wet clothes or shoes, install the equipment on a wet or humid surface nor dip it in water or any other liquid, and do not spray water directly on it.
- 1.1.2 The use of the equipment must be always supervised specially when used next to children.
- 1.1.3 Before cleaning and when not in use or before inserting or removing accessories, maintenance, or other services, disconnect machine from power source.
- 1.1.4 Do not use the equipment if the cord or the plug is damaged. Do not leave the electric cable on the edge of the table or counter nor let it touch hot surfaces.
- 1.1.5 Do not use the equipment if it is not working correctly, nor if it has been damaged in any way. In case that happens, take the equipment to the nearest Technical Assistance to check it up.
- 1.1.6 The use of accessories not recommended by the manufacturer may cause personal hurt.
- 1.1.7 Keep your hands or any tool out of the machine while operating to avoid personal hurt or any damage to the equipment.
- 1.1.8 During operation, never wear loose clothes with wide sleeves principally around the wrists.
- 1.1.9 Make sure the equipment voltage is the same as the network voltage and that the equipment is duly grounded.
- 1.1.10 Before switching the equipment ON, check if the Expeller Dish, the Plate and the Chamber Lid are correctly placed.
- 1.1.11 Never introduce the fingers or any other object inside the feeding opening. Always use the Stumpers.
- 1.1.12 Never introduce the fingers or any other object inside the opening where processed food comes out.

This equipment has been designed to be used in commercial kitchens, such as: restaurants, cafeterias, hospitals, bakeries, butcheries and so on.

This equipment is not recommended to be used:

- when continuous industrial production is necessary.
- work place has a corrosive or explosive atmosphere or it is contaminated with steam, dust or gas.

IMPORTANT

This equipment has a security system to guarantee the operator integrity. The operation of this equipment must be performed as described in the item “Operation” of this manual. Other procedures to operate this equipment are not safe and must not be used.

IMPORTANT

For the operator safety this equipment has a safety system not allowing to be accidentally started after an eventual electricity failure.

IMPORTANT

Make sure the cord is in perfect conditions for use. If it is not, change it for a new one in accordance with the technical specifications and safety rules. The substitution shall be made by a qualified professional, and shall respect the local safety norms.

IMPORTANT

This equipment must not be used by children or any persons with reduced physical or mental aptness, lack of experience or knowledge, unless they are under supervision or have received from the person responsible for safety proper instructions on how to use the equipment.

IMPORTANT

Children shall be watched in order to avoid them to play with the equipment.

IMPORTANT

In case of emergency, unplug the equipment.

IMPORTANT

Never spray water directly on the equipment.

6. Maintenance

Maintenance must be considered a set of procedures with the purpose to keep the equipment best operating conditions, therefore increasing the equipment life and safety.

* Cleaning – check item 3.3 Cleaning.

* Wiring - Check all wires regarding deteriorate conditions as well as all electric contacts (terminals) regarding tightening and corrosion.

*Contacts – ON/OFF switch, emergency button, reset button, electronic circuits etc , check the equipment in order to assure that all components are correctly working and the equipment operation is normal.

* Installation – make sure the installation followed item 2.1 instructions.

1 – Each month check:

- Check the electrical installation
- Measure the voltage at the socket
- Measure the working current and match it with the nominal current
- Check the tightening of all electric terminals to avoid bad contacts
- Check electric motor shaft clearance
- Check the wiring for overeating, insulation failures and mechanical damages.

2 – Each three month checks:

- Check electrical components such as ON/OFF switch, emergency button, reset button, electronic electric circuits , overeating, insulation failings, or mechanical damages
- Check bearings clearances
- Check retainers, O’rings, V’rings and other seals


TABLE 04

PROBLEM	CAUSES	SOLUTIONS
The equipment does not switch ON.	Wrong starting procedure.	Read item 3.1 Starting.
	Motor thermal protection turned ON.	Wait some minutes and try again.
	Electricity shortage.	Check network.
	Problem with the electric circuit.	Call Technical Assistance.
The equipment stops or slows down when processing the product.	The belt is sliding.	Adjust the belt tension.
	The safety device on the lid contact is failing.	Call Technical Assistance.
	Problem with the electric motor.	
The processed product remains inside the equipment.	The expeller dish is missing.	Place the dish.
	Off load throat obstructed.	Clean the throat.
Irregular cut.	Blunt blades or damaged blades.	Change the plate.
Burnt smell or smoke.	Problem with the electric circuit.	Call Technical Assistance.
Damaged cord.	Problems with equipment transportation.	Call Technical Assistance.
Abnormal noises.	Problem with the bearings.	Call Technical Assistance.

1.2 Main Components

All components are made with carefully selected materials, in accordance with Skymssen experience and standard testing procedures.

PICTURE 01

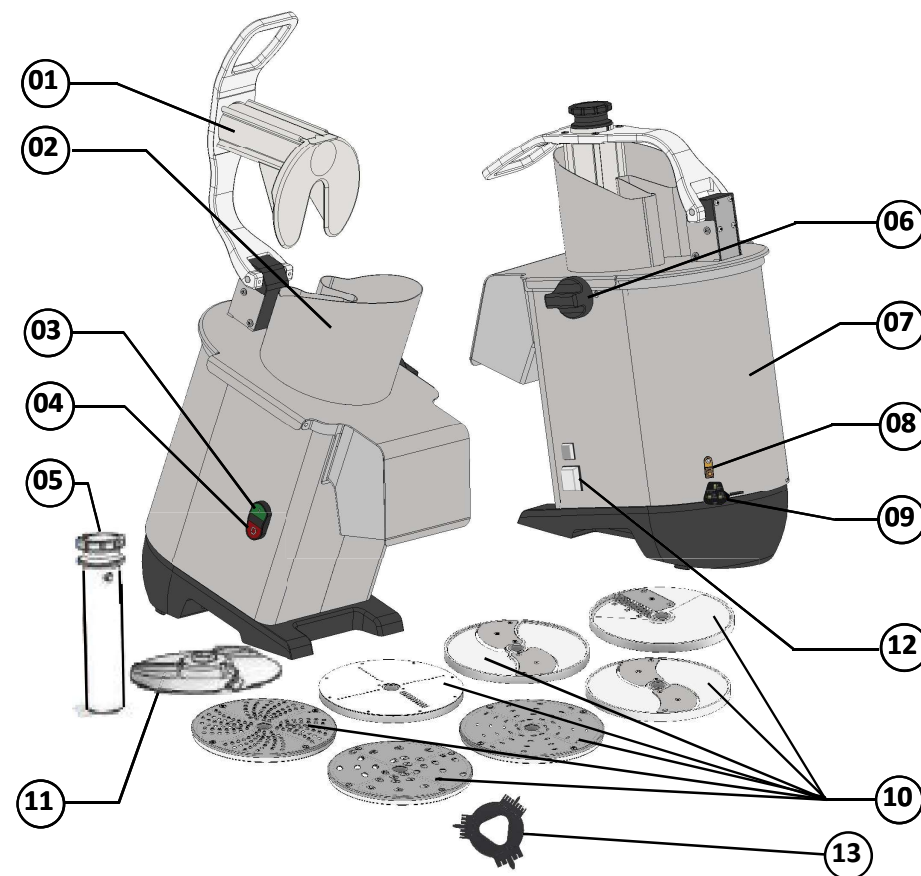

01 – Large Food Pusher
 02 – Chamber Lid
 03 – ON Switch
 04 – OFF Switch
 05 – Small Food Pusher
 06 – Lock Lid
 07 – Housing

08 – Grinding
 09 – Cable
 10 – Optional Discs
 11 – Expeller Plate
 12 – General Switch
 13 – Cube Grill Cleaner

1.3 Technical Characteristics

This equipment is suited to execute several cut types such as slice, shred and grate. It can process a great variety of vegetables, keeping its nutritious proprieties, color and juice, avoiding waste and saving the cutting uniformity.

TABLE 01

CHARACTERISTIC	UNIT	PA7 PRO
Voltage	V	230
Frequency	Hz	50
Power rating	W	600
Height	mm	590
Width	mm	325
Depth	mm	520
Net Weight	kg	27,8
Gross Weight	kg	32

1.4 Selecting the Plates

EXPELLING PLATE

The expelling plate is responsible for expelling de product processed in the in the housing. It will Always have to be used no matter what disc is chosen.

SHREDING DISCS - E.

Used to shered products (except fibered products).

SLICER SCALLOP CUT - W.

Used to Slice products (except leaves), to result as scallop after the process.

GRATER DISCS - Z.

Used to shred products that after being processed, will have sections like half-moon.

SQUARE SHREDING DISCS - H.

Used to shrede products that after being processed, will have square cuts.

GRATER DISC - V

Used to grate products (except leaves).

IMPORTANT

TABLE 02 (Selecting Cut Table) gives a hint to select the kind of cut usually desired in kitchens and restaurants. The resulting cuts will depend of the state, the type and the quality of the product to be processed.

Check the level of oil.

Do NOT insert your fingers in between belts and pulleys nor chains and gears.

4.6 Maintenance

4.6.1 Danger

Any maintenance with the machine in working situation is dangerous.

TURN IT OFF BY PULLING THE PLUG OFF THE SOCKET DURING MAINTENANCE.

IMPORTANT

Always remove the plug from the socket in any emergency situation.

4.7 Warning

Electrical or mechanical maintenance has to be undertaken by qualified personnel.

The person in charge of maintenance has to be sure that the machine is under TOTAL SAFETY conditions when working.

5. Analyses and Problem Solving

5.1 Problems Causes and Solutions

The equipment has been designed to need minimum maintenance, however, some performance failures may happen due mainly to natural worn out, caused by the use of the Processor.

If some problems arise with your Processor check Table - 04 below where there are detailed some possible solutions

circuits.

The oil reservoirs have to be filled until the indicated level. Check and refill if necessary.

4.3 Routine Inspection

4.3.1 Advice

When checking the tension of the belts or chains, DO NOT insert your fingers between the belts and the pulleys and nor between the chain and the gears.

4.3.2 Precautions

Check the motor and sliding or turning parts of the machine in case of abnormal noises.

Check the tension of the belts and chains and replace the set when belts or chains show signs of wearing.

When checking the tension of belts or chains DO NOT insert your fingers between belts and pulleys, nor between the chains and gears.

Check protections and safety devices to make sure they are working properly.

4.4 Operation

4.4.1 Warnings

Do not use the machine with long hair that could touch any part of the machine. This might lead to a serious accident. Tie your hair up well and/or cover it with a scarf.

Only trained or skilled personnel shall operate this machine.

Never touch turning parts with your hands or any other way.

NEVER operate the machine without any original safety devices under perfect conditions.

4.5 After Finishing The Work

4.5.1 Precautions

Always TURN THE MACHINE OFF before cleaning by removing the plug from the socket.

Never clean the machine unless it has come to a complete stop.

Put all the components back to their functional positions before turning the machine ON again.

TABLE 02

CHART OF SELECTED CUTS						
Food / Cut	Slices E	Wavy Slices W	Squared Sh. H	Grater Z	Grated V	Cubes
Zucchini	E1/E2/E3/E5/E8	W3	H1,5/H3/H7/H10	Z3/Z5/Z8		
Banana*	E3/E5					
Potato	E1/E2/E3/E5/E8	W3	H1,5/H3/H7/H10	Z3/Z5/Z8		E8+GC8 PRO / E10+GC10 PRO / E14+GC14 PRO
Beet	E1/E2/E3/E5/E8		H1,5/H3/H7/H10	Z3/Z5/Z8		E8+GC8 PRO / E10+GC10 PRO / E14+GC14 PRO
Nuts					V	
Onion	E1/E3/E5		H1,5/H3	Z3/Z5		E5+GC8 PRO / E8+GC8 PRO
Carrot*	E1/E2/E3/E5/E8	W3	H1,5/H3/H7/H10	Z3/Z5/Z8		E8+GC8 PRO / E10+GC10 PRO / E14+GC14 PRO
Chocolate					V	
Coconut				Z3/Z5/Z8	V	
Cabbage	E1/E2/E3					
Mushroom	E1/E2/E3/E5					
Lemon	E1/E2/E3/E5	W3				
Apple	E1/E2/E3		H3			
Toast					V	
Cucumber*	E1/E2/E3/E5/E8	W3	H1,5/H3	Z3/Z5		
Bell Pepper	E1/E2/E3/E5/E8	W3				E5+GC8 PRO / E8+GC8 PRO
Cheese				Z3/Z5/Z8	V	
Parmesan					V	
Radish	E1/E2/E3/E5/E8	W3	H1,5/H3	Z3/Z5/Z8		
Lettuce	E1/E2/E3/E5/E8		H3/H7/H10	Z3/Z5/Z8		
Orange	E3/E5					
Tomato	E1/E2/E3/E5					E5+GC8 PRO / E8+GC8 PRO
Papaya						E14+GC20 PRO
Melon						E14+GC20 PRO
Watermelon						E14+GC20 PRO

***For these products, we recommend to use only the small throat. Using the big throat will result in a bad product processing quality.**

1.5 Available Discs

In the following Table 03 you will find the available Plates for your processor:

TABLE 03

SUPPLIED DISCS WITH THE EQUIPMENT	
DENOMINATION	MODEL
SLICER DISC - 1 mm	E1
SLICER DISC - 5 mm	E5
JULIENNE DISC - 3x3 mm	H3
JULIENNE DISC - 10x10 mm	H10
GRATER DISC - 5 mm	Z5
HARD GRATING DISC	V
DICING BLADE - 8x8 mm	GC8 PRO

OPTIONAL DISCS	
(Sold Separately)	
DENOMINATION	MODEL
SLICER DISC - 2 mm	E2
SLICER DISC - 3 mm	E3
SLICER DISC - 8 mm	E8
SLICER DISC - 10 mm	E10
SLICER DISC - 14 mm	E14
JULIENNE DISC - 1,5x1,5 mm	H1,5
JULIENNE DISC - 7x7 mm	H7
WAVY SHREDING DISC - 3 mm	W3
GRATER DISC - 3 mm	Z3
GRATER DISC - 8 mm	Z8
DICING BLADE - 10x10 mm	GC10 PRO
DICING BLADE - 14x14 mm	GC14 PRO
DICING BLADE - 20x20 mm	GC20 PRO

been made and responded.

4.1.3 Advices

- * In case of power shortage, immediately switch the machine off.
- * Use recommended or equivalent lubricants, oils or greases.
- * Avoid mechanical shocks, once they may cause damages or bad functioning.
- * Avoid water, dirt or dust contact to the mechanical and electrical components of the machine.
- * DO NOT change the standard characteristics of the machine.
- * DO NOT remove, tear off or maculate any safety or identification labels stuck on the machine. If any labels have been removed or are no longer legible, contact your nearest dealer for replacement.

4.2 Safety Procedures and Notes before Switching the Machine ON

IMPORTANT

Carefully read ALL INSTRUCTIONS of this manual before turning the machine ON.
Be sure to well understand all the information contained in this manual. If you have any question contact your supervisor or your nearest Dealer.

4. General Safety Practices

IMPORTANT

If any recommendation is not applicable to your equipment, please ignore it.

The following safety instructions are addressed to both the operator of the machine as well as the person in charge of maintenance.

The machine has to be delivered only in perfect conditions of use by the Distributor to the user. The user shall operate the machine only after being well acquainted with the safety procedures described in the present manual. READ THIS MANUAL WITH ATTENTION.

IMPORTANT

Any change in the protection systems and safety devices will during operation, create serious risks to the operator physical integrity.

4.1 Basic Operation Procedures

4.1.1 Dangers

Some areas of the electric device have parts that are connected or have parts connected to high voltage. These parts when touched may cause severe electrical shocks or even be lethal.

Never touch manual commands such as switches, buttons, turning keys and knobs with your hands wearing wet clothes and/or wet shoes. By not following these instructions operator could be exposed to severe electrical shocks or even to a lethal situation.

4.1.2 Warnings


- * The operator has to be well familiar with the position of ON/OFF Switch to make sure the Switch is easy to be reached when necessary.
- * Before any kind of maintenance, physically remove plug from the socket.
- * Provide space for a comfortable operation thus avoiding accidents.
- * Water or oil spilled on the floor will turn it slippery and dangerous. Make sure the floor is clean and dry.
- * Before using any commands (switch, buttons, lever), be sure it is the correct one. In case of doubt, consult this manual.
- * Never touch any manual commands (switch, buttons, lever) unadvisedly.
- * If any work is to be made by two or more persons, coordination signs will have to be given for each operation step. Every step of the operation shall be taken only if a sign has

2 Installation and Pre Operation

2.1 Installation


2.1.1 Placing

Place the equipment on a dry, stable and level surface having a preferential 850 mm height above the floor.

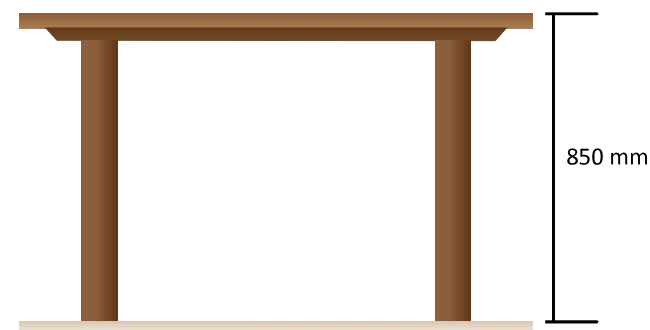

To know the necessary installation area, see at PICTURE 02 the equipment dimensions.


PICTURE 02

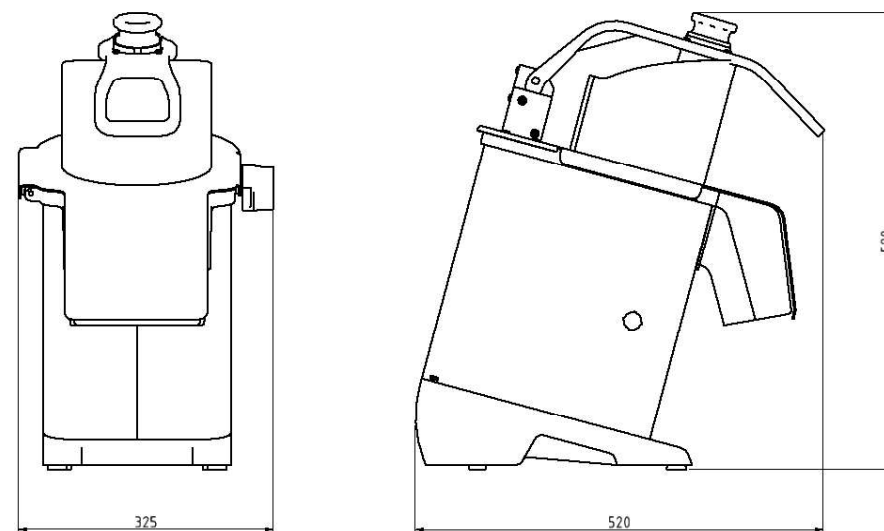

IMPORTANT

Do not operate the equipment when it is placed near a table edge (PICTURE 03).

PICTURE 03

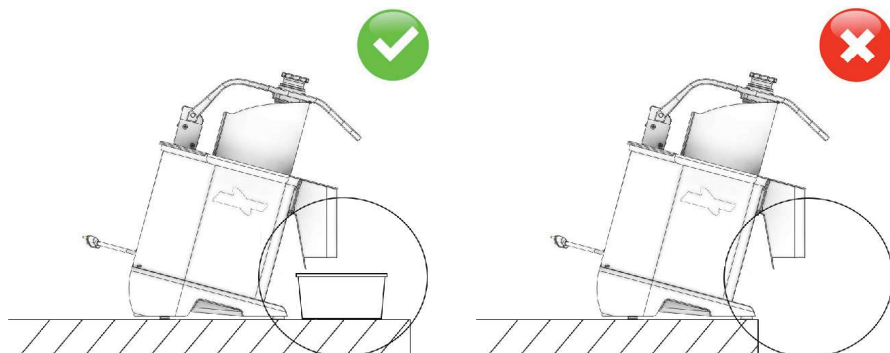


2.1.2 Electrical Installation

Before plugging the equipment on the socket, make sure the network voltage is the same as indicated on the cord label.

The power plug has 3 (three) pins, the middle one is designed to grounding – Ground Pin. All the 3 (three) pins must be properly connected before operating the equipment.

PICTURE 04

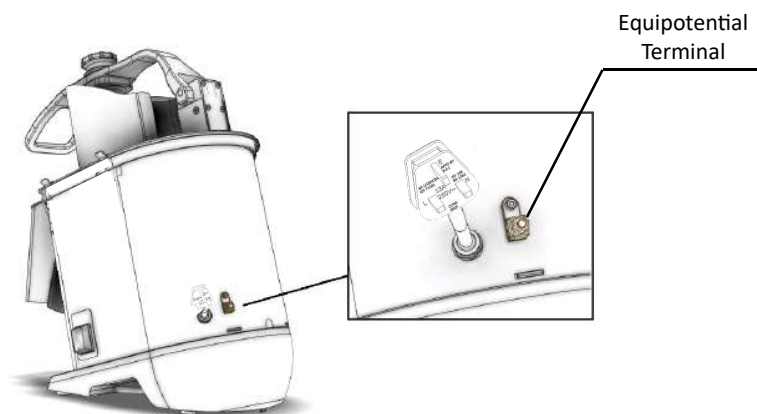

3.4 Cautions with Stainless Steel

The Stainless Steel may present rust signs, which are ALWAYS CAUSED BY EXTERNAL AGENTS, especially when the cleaning or sanitization is not constant and appropriate.

The Stainless Steel resistance towards corrosion is mainly due to the presence of chrome, which in contact with oxygen allows the formation of a very thin protective coat.

This protective coat is formed through the whole surface of the steel, blocking the action of external corrosive agents.

When the protective coat is broken, the corrosion process begins, being possible to avoid it by means of constant and adequate cleaning.

Cleaning must always be done immediately after using the equipment. For such end, use water, neutral soap or detergent, and clean the equipment with a soft cloth or a nylon sponge.

Then rinse it with plain running water, and dry immediately with a soft cloth, this way avoiding humidity on surfaces and especially on gaps. The rinsing and drying processes are extremely important to prevent stains and corrosion from arising.

IMPORTANT

Acid solutions, salty solutions, disinfectants and some sterilizing solutions (hypochlorites, tetravalent ammonia salts, iodine compounds, nitric acid and others), must be AVOIDED, once it cannot remain for long in contact with the stainless steel.

These substances attack the stainless steel due to the CHLORINE on its composition, causing corrosion spots (pitting). Even detergents used in domestic cleaning must not remain in contact with the stainless steel longer than the necessary, being mandatory to remove it with plain water and then dry the surface completely.

Use of abrasives:

Sponges or steel wool and carbon steel brushes, besides scratching the surface and compromising the stainless steel protection, leave particles that rust and react contaminating the stainless steel. That is why such products must not be used for cleaning and sanitization. Scrapings made with sharp instruments or similar must also be avoided.

Main substances that cause stainless steel corrosion:

Dust, grease, acid solutions such as vinegar, fruit juices, etc., saltern solutions (brine), blood, detergents (except for the neutral ones), common steel particles, residue of sponges or common steel wool, and also other abrasives.

c – The third device turns the motor of the machine OFF in case of overheating. Wait for some minutes until the machine gets cold and turn it back ON, pressing the ON Switch.

IMPORTANT

**It is not recommended to let the equipment running without any product inside.
To increase the equipment's life span, switch it OFF when not in use.**

IMPORTANT

The out load of the products happens by gravity. Inside of the Chamber and the out load Throat shall be regularly cleaned to avoid obstruction.

3.3 Cleaning and Sanitizing

IMPORTANT

Do never clean the equipment if connected to the electric network.

Step 1: Turn the General Switch OFF and unplug the equipment.

Step 2: Disassemble the equipment (Item 2.2.1).

Step 3: Wash the removable parts with warm water and neutral soap.

IMPORTANT

Never spray water on the equipment, excepting the removable parts, when removed.

Step 4: When washing the plates, handle them with care. Do not throw them one against the other neither against other objects, in order to save the knives.

IMPORTANT

Use steel gloves to handle the plate The knife have sharp edge that may wound the operator.

Step 5: To clean the Motor Housing and the Plate Chamber use a wet cloth with hot water and neutral soap.

The picture shown above indicates the external equipotential connection terminal.

The connection shall be used to make sure that there are no potential differences among the different equipment connected to the network, avoiding as much as possible electric shock risks.

The different equipment shall be connected one to the other by means of their equipotential terminals.

2.2 Pre Operation

First, make sure the equipment is stable in its position. Before using the equipment, the parts that will be in contact with the product that will be processed shall be washed with water and soap (see item 3.3 Cleaning and Sanitizing).

2.2.1 Disassembling the Plates

Step 1: Open the Lid fastenings and tilt the Chamber Lid (#02 Pic.05);

IMPORTANT

Before opening the Chamber Lid #02 (Pic. 05), make sure the Plate #03 (Pic. 05) is stopped.

IMPORTANT

Steel Gloves should be used to handle the Plates, since the knife edges are sharp and may wound the operator.

Step 2: Carefully remove the Plate #03 (Pic. 5), turning it anticlockwise and pulling it up;

Step 3: Remove the Expeller Dish #04 (Pic. 05), lifting it up.


2.2.2 Assembling the Plates

Step 1: Place the Expeller Dish #04 (Pic. 05);

Step 2: Carefully place the Plate #03 (Pic. 05) chosen for the operation;

Step 3: Close the Chamber Lid #02 (Pic. 05);

PICTURE 05

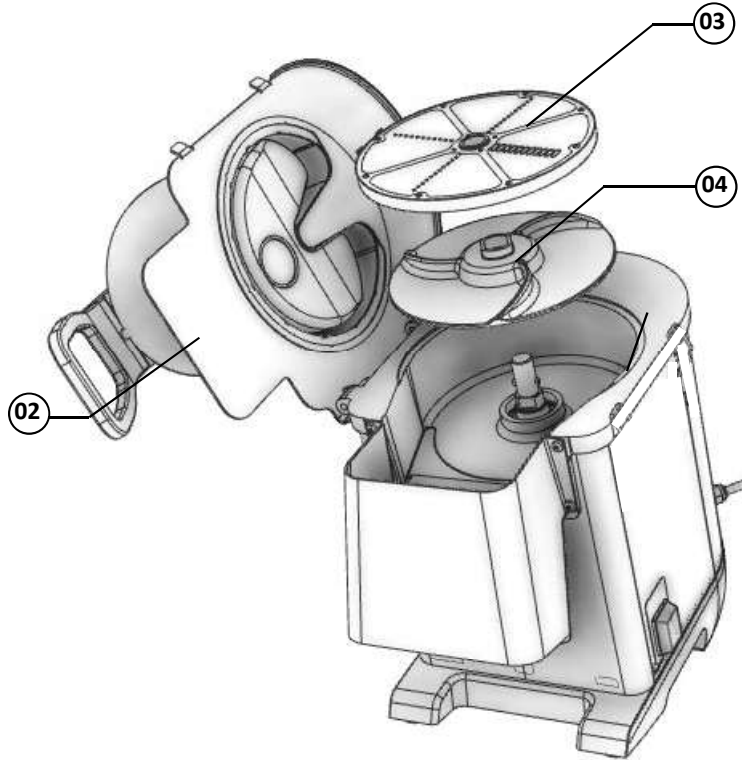

3. Operation

3.1 Starting

Before turning the equipment ON:

- Make sure the Chamber Lid is closed and properly locked;
- Make sure the Small Stumper is properly placed inside the Opening;
- Make sure the General Switch is on position "I" (ON) and if the plug is connected;

To start the equipment, follow these steps:


- Step 1: Press the OFF Switch to reset the machine;
- Step 2: Press the ON Switch to start the machine;

After this procedure, the equipment should start. If this does not happen, verify the possible causes and solutions stated on item 5 of this manual. (Analyses and Problem Solving).

3.2 Operation Procedures

3.2.2 Feeding the Throats

PICTURE 06

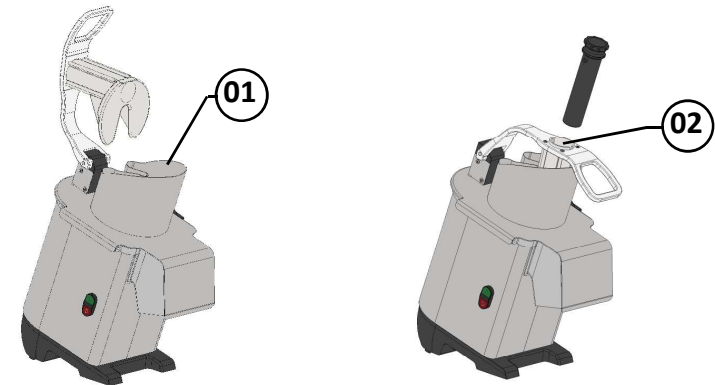

The food processor has two Feeding Throats, each one of them featuring its Particularities.

-The Great Throat #01 (Pic. 06) is used to process large quantities of food (such as onions or potatoes), products having great dimensions (such as cabbage or beetroots) and also when slices should follow a special direction (such as lemons or tomatoes).

- The Small Throat #02 (Pic. 06) is used to cut long products (such as carrot or cucumber).

IMPORTANT

Always use the Stumpers in their throat, never use other tools, and principally do not use the hands to push the food. If the stumpers get lost, contact your dealer to replace them.

Obs.: For the operator safety, this equipment has three devices capable of turning the machine OFF and avoid accidents.

a - The first one turns the machine OFF automatically when the Chamber Lid is removed. When it is back to its position, the machine goes back to work automatically .

b - The second device interrupts the machine operation when the Great Stumper is lifted, opening the Great Throat. When the Stumper is returned to its position, the machine goes back to work automatically.