



AMR-15



INSTRUCTION MANUAL

QUICK DOUGH MIXER

Model
AMR-15




E-mail: at@siemsen.com.br

METALÚRGICA SIEMSEN LTDA.
Rua Anita Garibaldi, nº 262 – Bairro: São Luiz – CEP: 88351-410
Brusque – Santa Catarina – Brasil
Fone: +55 47 3255 2000 – Fax: +55 47 3255 2020
www.siemsen.com.br - comercial@siemsen.com.br

- ALÉM DESTAS MÁQUINAS, FABRICAMOS UMA LINHA COMPLETA DE EQUIPAMENTOS. CONSULTE SEU REVENDEDOR.
- ESTE PRODUTO CONTA COM ASSISTÊNCIA TÉCNICA, REPRESENTANTES E REVENDEDORES EM TODO TERRITÓRIO NACIONAL.
DEVIDO À CONSTATANTE EVOLUÇÃO DOS NOSSOS PRODUTOS, AS INFORMAÇÕES AQUI CONTIDAS PODEM SER MODIFICADAS SEM AVISO PRÉVIO.

5.2 Electrical Diagram

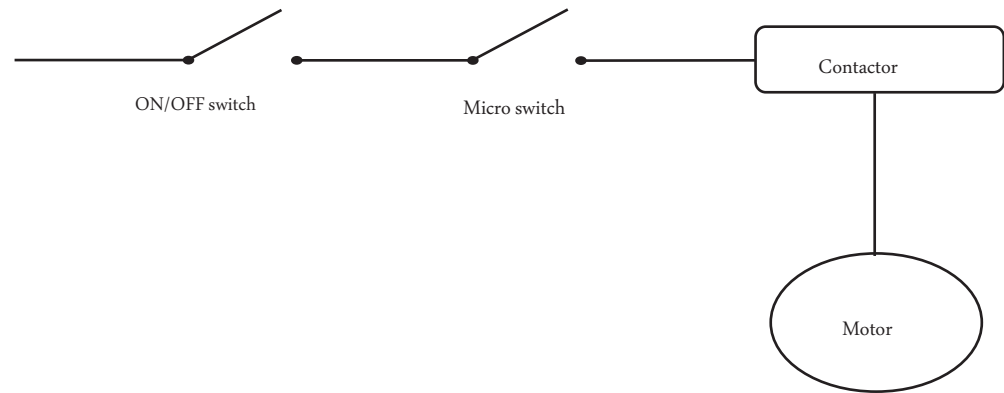

SUMMARY

1. Introduction	01
1.1 Safety	01
1.2 Main Components	01
1.3 Technical Characteristics	02
2. Installation	02
2.1 Installation	02
3. Operation	02
3.1 Starting	02
3.2 Instructions on how to operate	03
3.3 Cleaning	03
4. General Safety Practices	05
4.1 Basic Operation Procedures	05
4.2 Safety Procedures and Notes before switching the machine on	06
4.3 Routine Inspection	07
4.4 Operation	07
4.5 After finishing the work	08
4.6 Maintenance	08
5. Analysis and Problem Solving	08
5.1 Problems, Cause and Solutions	08
5.2 Electric Diagram	09

1. Introduction

1.1 Safety

When not properly used the Quick Dough Mixers are potentially dangerous machines. Servicing, cleaning or any other operation shall be made by trained people. Plug has to be off outlet during any of these operations.

- * Unplug the machine when you need to remove any removable part during cleaning, servicing or any other operation.
- * Never make use of any tool or instrument that is not originally part of the machine during any operation. Be sure that removable parts are properly installed in its correct position.
- * Never throw water directly to the machine.
- * Never use inappropriate clothes mainly long sleeves during operation.
- * Keep hands off turning parts.
- * Do not operate the machine wearing wet clothes or wet shoes.
- * Before operating the machine be sure it is grounded properly.
- * Operators have to tie his/her hair up before starting operation.
- * Take good care of this manual and have it handy for use at any time.



1.2 Main Components

All components of this machine were designed and made to its proper function according to pattern tests and experience of Siemens.

PIC. 01



- 1Casing
- 2Casing Cover
- 3Lid
- 4Safety system

4.6.2 Advice

Electrical or mechanical maintenance has to be undertaken by qualified personal. Person in charge has to be sure that the machine is under TOTAL SAFETY conditions when working .

5 Analysis and Problems Solving

5.1 Problem, causes and solutions

The Spiral Dough Mixers were designed to operate with the need of minimum maintenance but the natural wearing caused by longer use of the equipment may occasionally cause some malfunctions.
If such problem occurs with your mixer refer to Table 02 in which the most common situations are listed with recommended solutions.

Table 02

<i>Problems</i>	<i>Causes</i>	<i>Solutions</i>
Burning odor and/or smoke	Motor or other electric parts problems	Call technical assistance
Machine starts but takes some time to turn	Belts not fastened enough	Call technical assistance
Strange noises	Defective bearings	Call technical assistance
Machine stops during operation	Lack of power	Check if the plug is on its socket, and if there is electric power.
	Belts not fastened enough	Call technical assistance
	Bad contact in ON/OFF Switch	Call technical assistance

Any manual command (switch, button or lever) shall be given only after to be sure it is the correct one .

4.3 Routine Inspection

4.3.1 Advice

When checking the tension of the belts or chains, DO NOT introduce your fingers between the belts and the pulleys and nor between the chain and the gears.

4.3.2 Precautions

Check if motors and sliding or turning parts of the machine produce abnormal noises .
Check the tension of the belts and chains and replace the set when belt or chain show signs of being worn out.
When checking tensions of belts or chain DO NOT introduce your fingers between belts and pulleys , nor between the chains and gears.
Check protections and safety devices to make sure they are working properly.

4.4 Operation

4.4.1 Advice

Be sure your hair is not loose in order to avoid getting caught by turning parts which could lead to a serious accident. Tie your hair up well and/or cover your head with a scarf.
The operation performed by not trained or skilled personnel shall be forbidden.
Never touch turning parts with your hands or in any other way.
NEVER operate machine without all original safety devices under perfect conditions.

4.5 After Finishing The Work

4.5.1 Precautions

Always TURN THE MACHINE OFF by removing the plug from the socket before cleaning the machine. Never clean the machine unless it has come to a complete stop. Put all components back to their functional positions before turning it ON again. Check level of oil. DO NOT place your fingers in between belts and pulleys nor chains and gears.

4.6 Maintenance

4.6.1 Danger

Any maintenance with the machine in working situation is dangerous. TURN IT OFF BY PULLING THE PLUG OFF THE SOCKET DURING MAINTENANCE.

1.3 Technical Characteristics

The Quick Dough Mixer is ideal for kneading and mixing several types of dough, such as: pizza, bread, cakes, biscuits and pasta.

Non-adherent stainless steel bowl.

The Safety System (No.4 - Pic.1) connected to the Lid , stops the machine when the lid is lifted .

Table – 01

Technical Specifications - AMR-15

Description	Three phase	Single Phase
Voltage (V)	220 or 380(**)	110 or 220(**)
Frequency (Hz)	50 or 60(*)	50 or 60(*)
Power Rating (HP)	2	2
Consumption (Kw/h)	1,5	1,5
Dimensions (mm)	680x485x660	680x485x660
Net Weight (Kg)	66	66
Gross Weight (Kg)	86	86
Production (Kg/h)	150	150
Ready Dough Capacity (Kg)	15	15

(*) The frequency will be only one , the rated motor frequency .

(**) The voltage will be only one , the rated motor voltage.

Load Chart

Model	Minimum Load	Maximum Load	
		Homogeneous Dough	Granulated Dough
AMR-15	2kg flour	9kg flour	9kg flour

Humidity Chart

Homogeneous Dough	Granulated Dough
Approximately 50% to 55% of humidity	Approximately 35% to 40% of humidity

2. Installation

2.1 Installation

The Quick Dough Mixers have to be installed onto a leveled and stable surface.
Before plugging in the machine check if power supply voltage and machine voltage are the same, three phase 220 V or 380 V , or single phase 110 V or 220V. Ground the machine properly, the three phase plug has three pins and a grounding wire , or the two phase plug has two pins and a grounding wire, all of them shall be properly connected.

IMPORTANT

The machine rotation is clockwise .
Check before to use if the rotation is really clockwise .

3 Operation

3.1 Starting

To start the machine use the ON/OFF Switch , you will find it placed on the casing (No.1Pic.01) .

Observation : : The machine will only start if the Lid (No. 03 Pict. 01) is down.

3.2 Instructions on how to operate

To improve the efficiency of your equipment we suggest to follow the below procedures:

- Lift the Lid (No.3 Pic.01) and put the dry ingredients in the Bowl, such as: flour, salt, sugar, butter, etc.
- Lower the Lid, and turn the machine ON and gradually start pouring liquid ingredients in the Bowl lifting the Lid, such as: water, milk, eggs, etc.
- Use cold water between 0 and 10 C (32 and 52 F) .
- In case ice is placed, use ice cubes .

3.3 Cleaning

IMPORTANT

Never clean the machine connected to the electric source . Unplug it before to start.

Do not use metal tools to clean the Bowl, and the Moving Mixer , to avoid to damage the stainless steel parts.

To clean the machine use a clean damp cloth .

IMPORTANT

Never throw water directly to the machine.

4. General Safety Practices

The following safety instructions are addressed to both the operator of the machine as well as the person in charge of maintenance. The machine has to be delivered only in perfect conditions of use by the Distributor to the user. The user shall operate the machine only after being well acquainted with the safety procedures described in the present manual. READ THIS MANUAL WITH ATTENTION.

4.1 Basic Operation Practices

4.1.1 Dangerous parts

Some areas of the electric devices have parts that are connected or have parts connected to high voltage. These parts when touched may cause severe electrical shocks or even be fatal.

Never touch manual commands such as switches, buttons, keys and knobs with your hands wearing wet clothes and/or wet shoes. By not following these instructions operator could be exposed to severe electrical shocks or even to a fatal situation.

4.1.2 Warnings

The operator has to be well familiar with the position of ON/OFF Switch to make sure the Switch is easy to be reached when necessary. Before any kind of maintenance, physically remove the plug from its socket .

Provide space for a comfortable operation thus avoiding accidents.

Water or oil spilled on the floor will turn it slippery and dangerous. Make sure the floor is clean and dry.

Before to give any manual command (switch, buttons, turn keys or lever) be sure the command is the correct one . Check this manual for further details if necessary.

Never use a manual command (switch , buttons , lever) unadvisedly.

If any work is to be made by two or more persons, coordination signs will have to be given for each operation step . Every step of the operation shall be taken only if a sign has been made and responded.

4.1.3 Advices

In case of power shortage, immediately turn the machine OFF.

Use recommended or equivalent lubricants, oils or greases .

Avoid mechanical chocks as they may cause damages.

Avoid penetration of water, dirt or dust into mechanical or electrical components of the machine.

DO NOT modify original characteristics of the machine.

DO NOT remove, tear off or maculate any labels stuck on the machine. If any labels has been removed or is no longer legible contact your nearest dealer for replacement.

READ CAREFULLY AND WITH ATTENTION THE SAFETY OR OPERATION INSTRUCTIONS LABELS DISPLAYED ON THE MACHINE , AS WELL AS THE INSTRUCTION MANUAL AND THE TECHNICAL CHARACTERISTICS WRITTEN INSIDE THIS MANUAL.

4.2 Safety Procedures and Notes Before Turning Machine ON

IMPORTANT

Carefully read ALL INSTRUCTIONS of this manual before turning the machine ON. Be sure to be familiar with the set and that you have well understood all information contained in this manual. If you have any question contact your supervisor or your nearest Dealer.

4.2.1 Danger

An electric cable or electric wire with damaged jacket or bad insulation could cause electrical shocks as well as electrical leak. Before use check conditions of all wires and cables.

4.2.2 Advices

Be sure ALL INSTRUCTIONS in this manual have been thoroughly understood. Every function and operational procedure have to be very clear to the operator. Contact your nearest Dealer for further questions.